

折页说明书：128g铜版纸四色印刷


C6 M68 Y100 K0

285.00 mm

尺寸: 285X620 毫米

155mm

RK ROYAL KLUDGE RK M87 MECHANICAL KEYBOARD

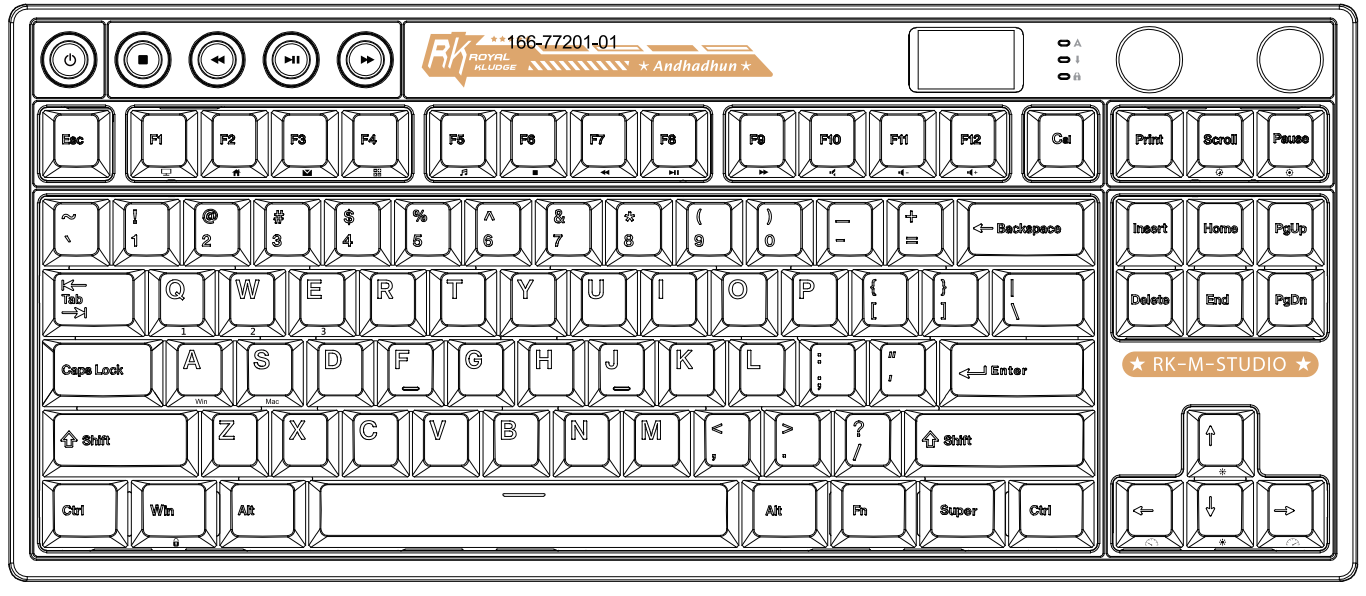


FCC WARNING: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This device is designed to be used in the United States only. The user is responsible for ensuring that the device is used in accordance with the applicable laws and regulations of the country in which it is used.

WARRANTY 12 MONTHS **GUARANTEE** Non-human damage 12-month warranty

PRODUCT BASIC

Manual	Switch and Keycaps Puller	Keyboard	USB Type-c cable	2.4G Dongle
--------	---------------------------	----------	------------------	-------------

FUNCTION KEYS

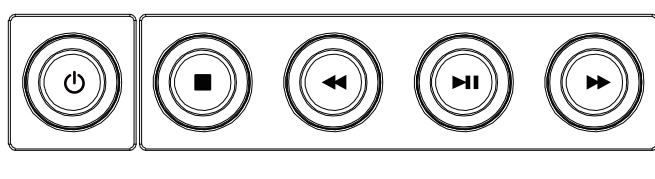

Key Functions from left to right: Long press for three seconds to turn on/off, Stop, Last Song, Play/Pause, Next Song

WIRED MODE

- Method 1: Insert the USB cable, press the left knob to enter the menu interface, select the USB mode, and confirm. The display screen will show "USB Success".
- Method 2: Insert the USB cable and press Fn+R briefly to switch to wired mode.

It supports 5V 1A rated power supply to charge.

BT CONNECTION

1. Long press "On" for 3 seconds to boot and press the left knob to access the menu. Use the left knob to select any of the following icons: [Bluetooth], [2.4G], [Wired].
- Pairing: For example, using the knob to select [Bluetooth] and then press and hold the left knob. The screen will display "BT Pairing" to indicate the pairing process is active.
- Reconnection: For example, select [Bluetooth] using the left knob and then press it briefly. The screen will display "BT Reconnect" to indicate the device has entered the reconnection state.
- BT connection with combination keys: 2. Long press "On" for 3 seconds to boot. Pairing: Press and hold Fn+Q/W/E for 3 seconds, for example, long-press Fn+Q, the display screen will show "BT Pairing" to indicate the pairing process is active.
- Reconnection: Press Fn+Q/W/E, for example, press Fn+Q briefly. The screen will display "BT Reconnect" to indicate the device has entered the reconnection state.
3. Turn on your computer/mobile device's BT and search for the keyboard. Connect to it with the displayed name: RK M87.
4. After the connection is successful, the display screen will show "BT Connected" and return to the Home screen automatically.

Friendly reminder: Prior to switching, kindly ensure that you have already paired three sets of BT devices.

2.4G CONNECTION

1. Long press "On" for 3 seconds to boot and press the left knob to access the menu. Use the left knob to select the following icon: [2.4G].
2. Press the left knob briefly to switch the keyboard to 2.4G mode, and the screen will display "2.4G Mode" to indicate the keyboard is in reconnection state, and then insert the 2.4G dongle.
3. After a successful reconnection, the display screen will show "2.4G Connected" and return to the Home screen automatically.

2.4G pairing with knob:


1. Press the left knob to access the menu, choose the icon [2.4G] and long-press the left knob until the screen shows "2.4G Pairing".
2. After a successful pairing, the display screen will show "2.4G Paired" and return to the Home screen.

2.4G pairing with combination keys:

1. Long-press Fn+P for 3 seconds until the display screen shows "2.4G Pairing" and then insert the receiver.
2. After a successful pairing, the display screen will show "2.4G Paired" and return to the Home screen.

Friendly reminder: The devices are already paired at the factory, so there is no need to pair them again.

DISPLAY OPERATION

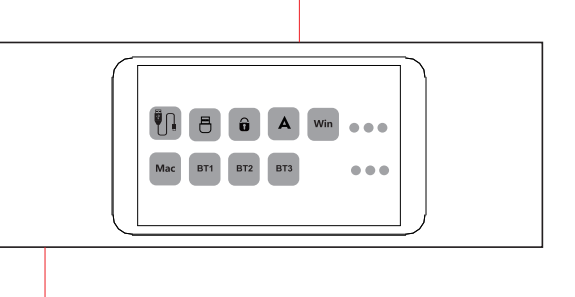

- Volume Adjustment
- Caps Lock
- Win Lock
- Win mode
- Mac mode
- Wired mode
- 2.4G
- BT

BACKLIGHT CONTROL

- Fn + ↑ Backlight brightness +
- Fn + ↓ Backlight brightness -
- Fn + ← Backlight speed -
- Fn + → Backlight speed +
- Fn + [Color] (RGB Version only) Switch backlight color
- Fn + [Scroll] Switch dynamic backlight effects
- Fn + [Space Bar] Press and hold for three seconds to restore factory settings
- Fn + [Win] Locking WIN key and APP key functions

INDICATOR LIGHT / KNOB FUNCTION


- Caps Lock
- Scroll Lock
- Win Lock

Right knob: Clockwise Volume +, Counterclockwise Volume -, Press to mute

Left Knob: Short press or rotate the knob to enter the settings menu, Short press for confirmation, rotate to select.

MANUAL TIME SETTING

Do the following from the main Time screen:



- Access to time setting: Method 1: Press and hold the Left Knob for approximately 5 seconds until the year starts flashing, entering the manual adjustment mode. Method 2: Select Time Settings in the menu.
- Press the Left knob in turn to adjust the Date (YY/MM/DD) and Time (HH/MM/SS) respectively.
- Similarly, rotate the knob to adjust the numbers: Clockwise to increase, Counterclockwise to decrease.
- After completing the settings.
- Press and hold the knob once more for 5s to save and exit Or Using the left knob to select "Yes".
- Alternatively, you can short press Fn+T to quickly save and exit.


620.00 mm

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620x285mm)-更新24-5-5.pdf 2024年5月6日 星期一

尺寸: 285X620 毫米


RK ROYAL KLUDGE RK M87 MECHANICAL KEYBOARD

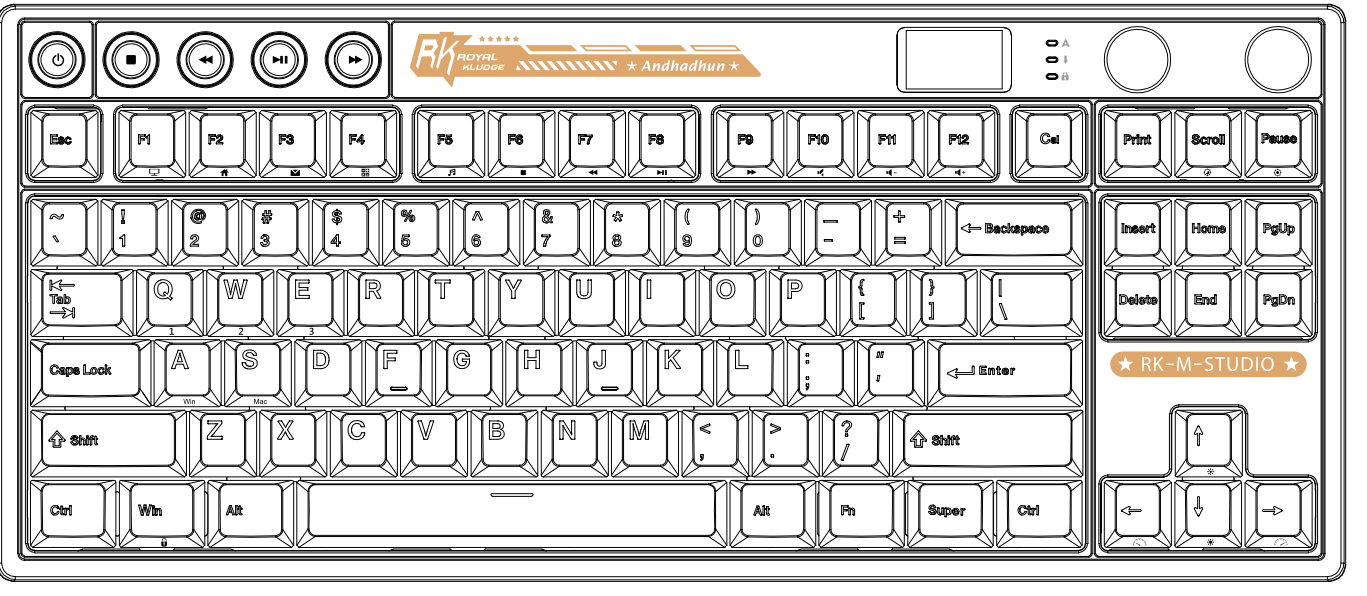

USED STATEMENT: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This device is designed to be used in the United States only. The user is responsible for ensuring that the device is used in accordance with the applicable laws and regulations of the country in which it is used.

WARRANTY 12 MONTHS **GUARANTEE** Non-human damage 12-month warranty

CUSTOM BACKLIGHT SET

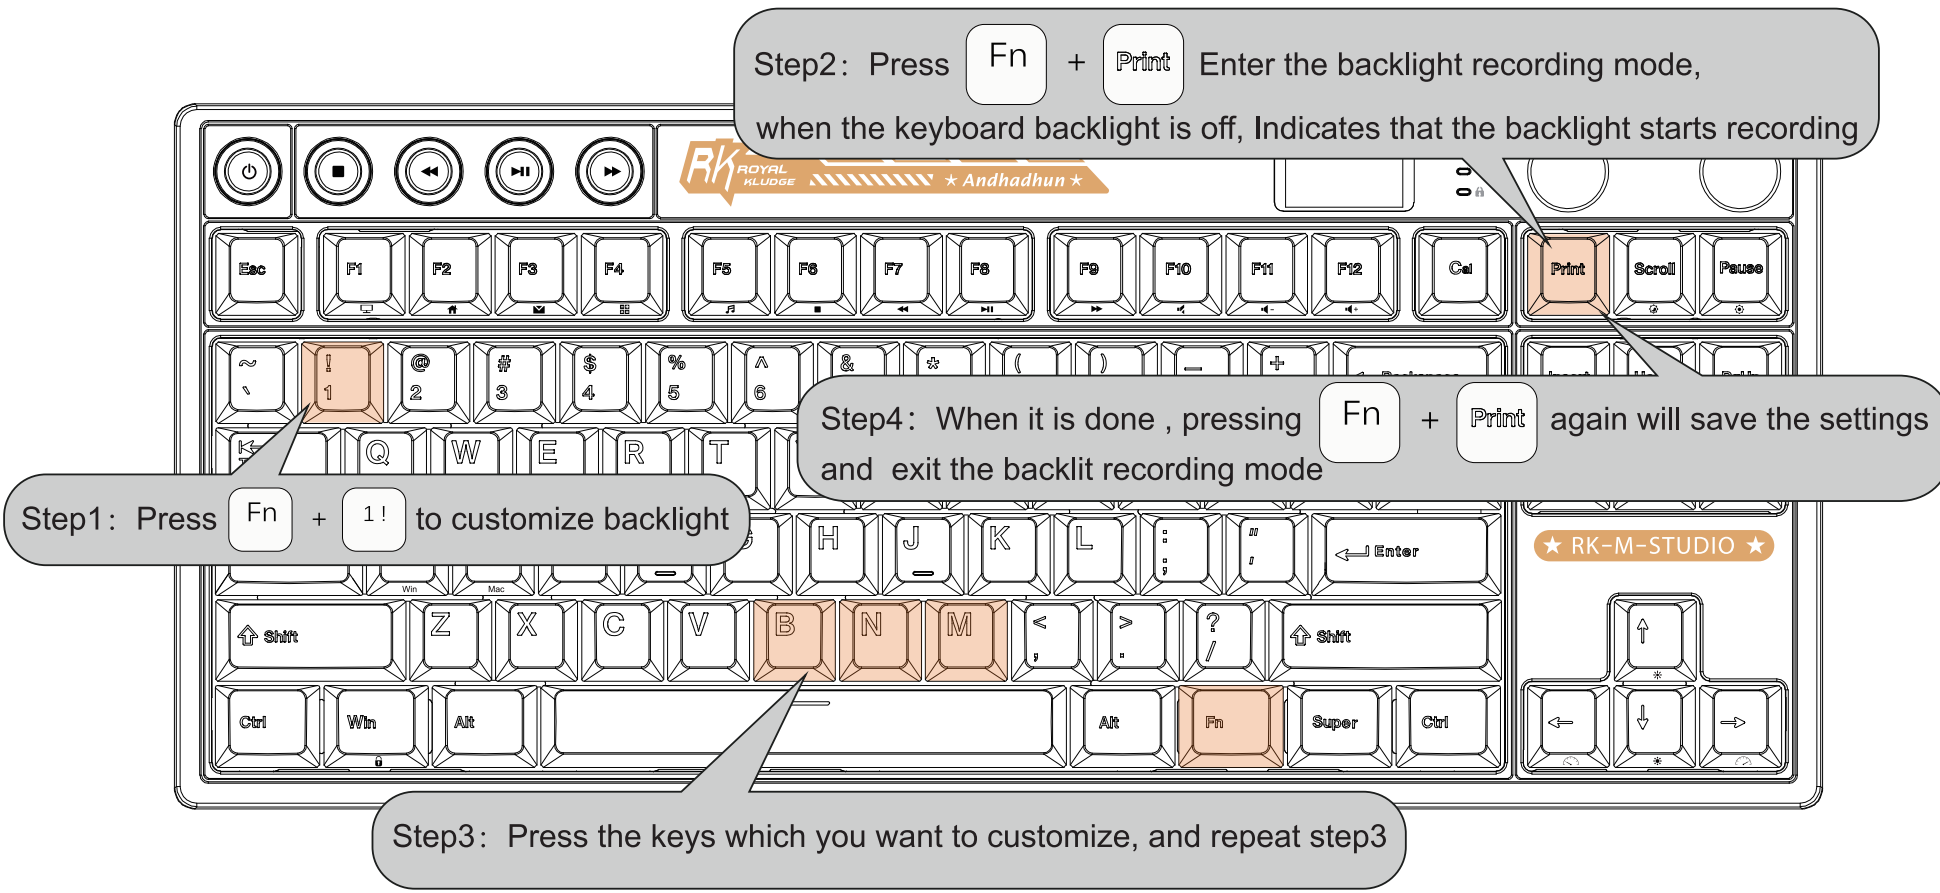

Step1: Press Fn + [1] to customize backlight

Step2: Press Fn + [Print] Enter the backlight recording mode, when the keyboard backlight is off, Indicates that the backlight starts recording

Step3: Press the keys which you want to customize, and repeat step3

Step4: When it is done, pressing Fn + [Print] again will save the settings and exit the backlit recording mode

MULTIMEDIA KEY FOR WINDOWS

Windows system(Fn + A: switch to Windows system)

Fn + F1 Computer	Fn + F7 Last Song
Fn + F2 Browser	Fn + F8 Play / Pause
Fn + F3 Mailbox	Fn + F9 Next Song
Fn + F4 Calculator	Fn + F10 Mute
Fn + F5 Player	Fn + F11 Volume-
Fn + F6 Stop	Fn + F12 Volume+


MULTIMEDIA KEY FOR MAC

MAC system(Fn + S: switch to Mac system)

Fn + F1 Screen Brightness -	Fn + F8 Play / Pause
Fn + F2 Screen Brightness +	Fn + F9 Next Song
Fn + F5 Keyboard Backlight Brightness-	Fn + F10 Mute
Fn + F6 Keyboard Backlight Brightness+	Fn + F11 Volume-
Fn + F7 Last Song	Fn + F12 Volume+

Have an issue with one of our RK products?

Feel free to contact us with any product issues or questions. We will reply as quickly as possible to ensure all your needs are handled. For better technical support, please contact rkgaming@rkgaming.com

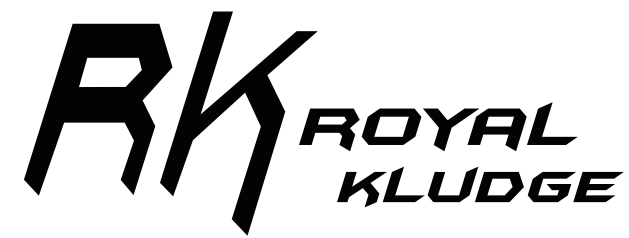

Executive standard: GB/T 14081-2010
Made in China www.rkgaming.com
Download Driver Address: www.rkgaming.com/Download/1/
16677201-01

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620x285mm)-更新24-5-5.pdf 2024年5月6日 星期一